


HM 3000



HM 3000

- the professional equipment

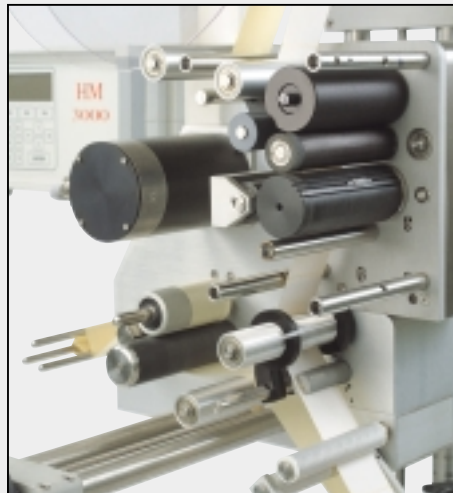

Technical specifications

Label speed	0-57 m/min.
Label width	15-120 mm Option = up to 250 mm Space (min. 2 mm) Option = reflective
Material	Anodized aluminium
Connection	
Start sensor	(NPN/PNP)
Alarm input	Input locking the labeller
Tacho input	The machine speed automatically follows the Tacho speed max. (max. 57 m/min.)
Alarm output	Relay output pulling at paper out (potential free)
Extra output	Max. 2 ea. e.g. for control of pneumatics.
Options	
Tacho	Is mounted for automatic adjustment of the machine speed.

HM3000 is the high-end label head which will meet your demands. HM3000 is the most reliable machine in the market. Furthermore, it has an incredible high-powered motor. HM3000 is developed and built for constant 24 hours operation in the industry. For this machine electronics are built using a high-powered 16 Bit microprocessor which monitors and controls all functions. HM3000 is milled out of one single block of aluminium in order to achieve very high stability.

Advantages

- Quick and easy product rearrangement
- Micro stepper motor control
- High capacity
- Very high repetitive accuracy
- Automatic adjusted label detector
- Possibility to save up to 100 different product/label set up
- Very high stability
- Easy assembly
- Will meet the demands of the future
- Mounts on different printing units, e.g. ProMax thermal/transfer printer or hot stamp