


HM 500



HM 500

- the best purchase in the market

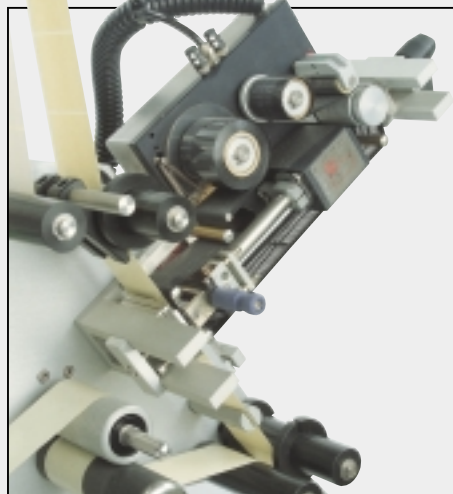

Technical specifications

Label speed	0-25 m/min.
Label width	15-100 mm
Label length	15-2000 mm
Label detector	Space (min. 2 mm) Option = reflective
Material	Anodized aluminium
Control	By means of 6 keys at the side member
Display	2 x 24 character display
Connection	e.g. Hot stamp Start sensors (NPN/PNP)

Factory installed options

Tacho input	The machine speed automatically follows the Tacho speed: max. 25 m/min.
Alarm output	Relay output pulling at paper out (potential free)
Extra output	Max. 2: for e.g. control of pneumatics
Alarm input	Input locking the labeller

The most compact label head with the most advantages and facilities as regards the price. This machine meets the demands of the future and also secures your investment. The electronics is integrated in the labeller and built over a high-powered 16 bit micro-processor, which monitors and controls all the functions. The label head is milled out of one aluminium block.

Advantages

- Stepper motor control
- High speed
- Very high repetitive accuracy and automatic adjusted label detector
- Up to 99 different products- and label set ups can be preserved
- Direct function reading via display
- Very large stability, simple assembling
- Connection directly at the machine
- Output for start of e.g. hot stamp